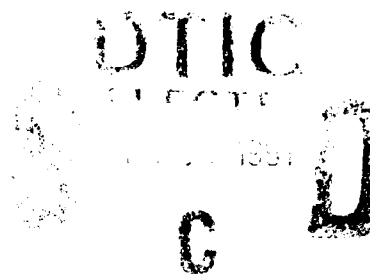AD-A243 814

HDL-CR-91-052-1

October 1991

DTIC

Theoretical Techniques and Computational Considerations for Determining the Electromagnetic Fields of a Biconical Antenna with Resistive Loading

by Ira Kohlberg

U.S. Army Laboratory Command
Harry Diamond Laboratories
Adelphi, MD 20783-1197

91-18853

REPORT DOCUMENTATION PAGE

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE	3. REPORT TYPE AND DATES COVERED
	October 1991	Final, from June 1989 to May 1991

4. TITLE AND SUBTITLE

Theoretical Techniques and Computational Considerations for Determining the Electromagnetic Fields of a Biconical Antenna with Resistive Loading

5. FUNDING NUMBERS

C: DAAL02-87-C-0052
PE: 62120

6. AUTHOR(S)

Ira Kohlberg
[HDL contact: Todd Waltemyer]

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

Kohlberg Associates, Inc.
5375 Duke Street
Alexandria, VA 22304

8. PERFORMING ORGANIZATION REPORT NUMBER

KAITR004-91

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

Harry Diamond Laboratories
2800 Powder Mill Road
Adelphi, MD 20783-1197

10. SPONSORING/MONITORING AGENCY REPORT NUMBER

HDL-CR-91-052-1

11. SUPPLEMENTARY NOTES

AMS code: P612120.H250011
HDL PR: XE79B2

12a. DISTRIBUTION/AVAILABILITY STATEMENT

Approved for public release; distribution unlimited.

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

This study develops a methodology for calculating the fields of a biconical antenna with resistive loading that appears to be computationally feasible. The resistively loaded case is found to require additional terms in the antenna region (compared to the lossless case), so that the interior boundary condition is satisfied. The solution of the interior boundary value equations requires the use of an orthogonal basis of functions in the radial direction, which reduces the problems to one that can be solved in maxtrix form. The computational implementation of this theory remains to be executed.

14. SUBJECT TERMS

EMP simulator, biconical antenna, resistive loading

15. NUMBER OF PAGES

40

16. PRICE CODE

17. SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION OF THIS PAGE	17. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT
Unclassified	Unclassified	Unclassified	UL

Contents

Figures

iii

I. INTRODUCTION

Wide-angle biconical antennas have been used for about two decades to produce both vertically and horizontally polarized electromagnetic fields for use in electromagnetic pulse (EMP) simulation. Approximate theoretical models have been used in conjunction with field mapping to provide a practical basis for testing and evaluating military systems against the EMP threat.

In recent years, however, there has been a greater interest in the development of biconical antenna EMP simulators that can deliver pulses with very fast risetimes. A major element of the waveform design for this type of simulator is the resistive loading of the antenna, which predominantly affects the intermediate- to late-time character of the radiated field. Over the years, numerous models have been developed to approximate the effects of resistive loading on field behavior. However, to my knowledge, this investigation is the first attempt to develop a rigorous theory leading to the prediction of the far fields from a resistively loaded wide-angle biconical antenna.

Schelkunoff [1] appears to have been the first to develop an exact theory of the biconical antenna in the absence of resistive loading. His method, although rigorously correct, presented formidable computational difficulties at the time of its inception (1941). The principal difficulties appeared to be the computation of the θ-dependent eigenfunctions that are characteristic of the biconical antenna with perfectly conducting interior surfaces. As shown in the appendix, this calculation requires the determination of the roots of polynomial equations involving hundreds of terms. While this computation is feasible today, it was virtually insurmountable in Schelkunoff's time.

Because of these numerical problems, emphasis was placed on obtaining approximate solutions in selected regimes. For example, Tai [2] developed a method for small-angle bicones, which is also briefly summarized by Kraus [3]. Techniques relevant to wide-angle bicones were developed by Smith [4] and Tai [5]. In all these cases, however, the issue of resistive loading was not addressed; perfectly interior conducting boundaries were assumed.

The purpose of this investigation is to theoretically evaluate the possibility of rigorously solving the biconical antenna problem with resistive loading. It appears that, at

1

least in a formal sense, I have been successful inasmuch as the methodology leads to closure on a solution. My method is an extension of the Schelkunoff formalism in the absence of resistive loading. Since this case forms the basic building block for the method, I provide a comprehensive discussion of Schelkunoff's methodology [6] using Kong's formalism [7]. This review is rendered in section 2.

In section 3 I extend the theory for the case of a resistively loaded bicone. The resistively loaded case is found to require additional terms in the antenna region, compared to the lossless case, so that the interior boundary condition is satisfied. The resulting equations do not lend themselves to analytical solutions in closed form. Closure is achieved through the introduction of an orthogonal basis of radial functions, which ultimately reduces the problem to one that can be solved in matrix form. The computational implementation of this theory remains to be developed.

A key element in the computational algorithm is the evaluation of the θ-dependent eigenvalues, u_i, and eigenfunctions, $T_{u_i}(\cos \theta_0)$ of the biconical antenna in the absence of resistive loading. These entities are essential in determining the parameters of the matrix equation leading to the determination of the fields. The computational considerations for $T_{u_i}(\cos \theta_0)$ are presented in the appendix.

2. REVIEW OF SCHELKUNOFF'S METHOD USING KONG'S FORMALISM

This section establishes the basic formalism that will be used in the general treatment of the resistively loaded biconical antenna of section 3. This material is extracted from Kong's text [7]. No attempt is made to reproduce the step-by-step derivation of the results. The reader is referred to Kong's text for more details. Wherever possible I have used Kong's notation, the notable exception being the use of "j" for his "$-i$."

This summary is rendered in a manner which highlights those changes that are necessary to extend the theory from the lossless case to the resistively loaded bicone.

Figure 1 shows a model of the biconical antenna, and the corresponding coordinate system. For the cases of interest only radial currents are present, with the accompanying conditions

$$H_r = H_\theta = E_\phi = 0 \ , \tag{1}$$

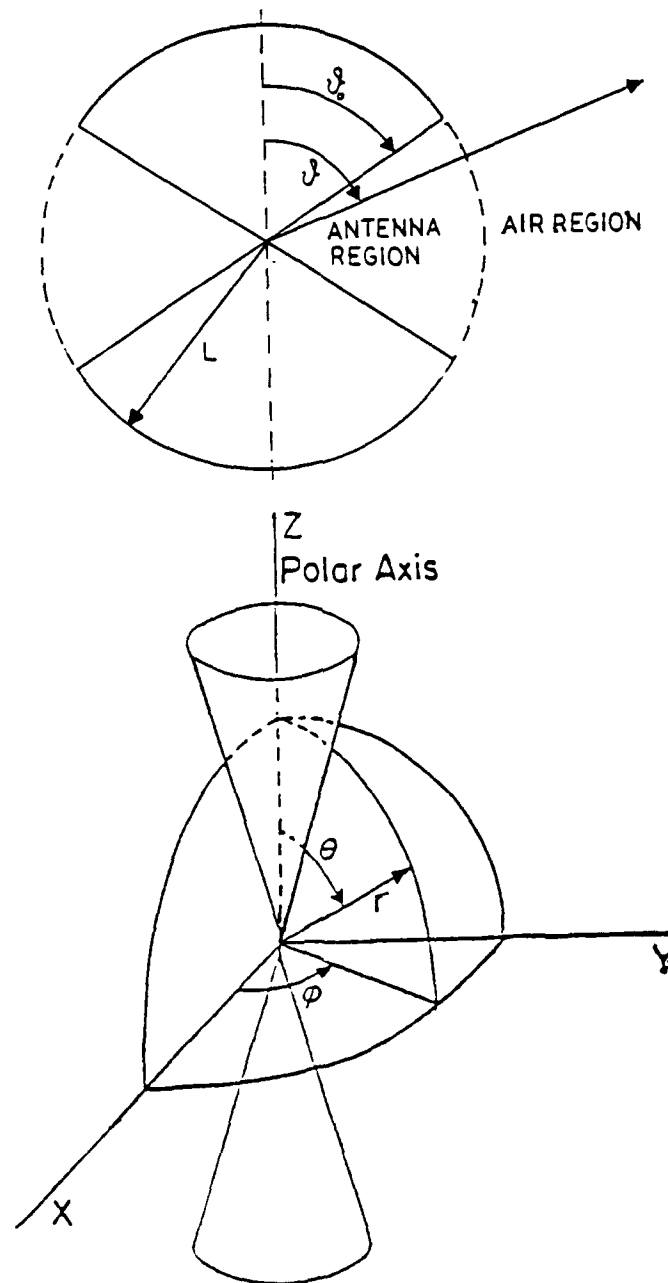$$\frac{\partial}{\partial \phi} = 0 \ . \tag{2}$$

Figure 1. Geometric considerations for biconical antenna.

3

Under the foregoing conditions, Maxwell's equations reduce to

$$\frac{1}{r}\left[\frac{\partial}{\partial r}(rE_\theta) - \frac{\partial E_r}{\partial \theta}\right] = -j\omega\mu_0 H_\phi , \tag{3}$$

$$\frac{1}{r \sin\theta}\left[\frac{\partial}{\partial\theta}(H_\phi \sin\theta)\right] = j\omega\epsilon_0 E_r , \tag{4}$$

$$-\frac{1}{r}\frac{\partial}{\partial r}(rH_\phi) = j\omega\epsilon_0 E_\theta , \tag{5}$$

where we have replaced $\partial/\partial t$ by $j\omega$.

In the air region, defined by the regime

$$r \geq L = \text{radius of bicone} , \tag{6}$$

the solution of equations (3) to (5) using separation of variables yields

$$H_\phi = \frac{1}{2\pi}\sum_{N=1}^{\infty} b_N h_N^{(2)}(kr)\dot{P}_N(\cos\theta) , \tag{7}$$

$$E_r = \frac{jZ_0}{2\pi kr}\sum_{N=1}^{\infty} N(N+1)b_N h_N^{(2)}(kr)\dot{P}_N(\cos\theta) , \tag{8}$$

$$E_\theta = \frac{jZ_0}{2\pi kr}\sum_{N=1}^{\infty} b_N \frac{d}{dr}\left[rh_N^{(2)}(kr)\right]\dot{P}_N(\cos\theta) , \tag{9}$$

where $P_N(\cos\theta)$ is the Legendre polynomial of order N, $h_N^{(2)}(kr)$ is the Hankel function of the second kind of degree N, the b_N's are constants to be determined from the solution of the problem, Z_0 is the impedance of free space $= \sqrt{\mu_0/\epsilon_0}$, and

$$\dot{P}_N(\cos\theta) = dP_N(\cos\theta)/d\theta . \tag{10}$$

It is important to note that the functional form of equations (7) to (9) will be the same with or without resistive loading. The mathematical structure of the external fields stems from the requirement that only outgoing waves be present outside the antenna, as well as the condition of symmetry,

4

$$H_\phi(\pi - \theta) = H_\phi(\theta) \; , \qquad\qquad \text{(a)}$$

$$E_\theta(\pi - \theta) = E_\theta(\theta) \quad . \qquad\qquad \text{(b)} \qquad\qquad \text{(11)}$$

When equation (11) applies, only odd values of N are allowed in the summations of equations (7) to (9). The first Hankel function, $h_1^{(2)}$, is given by

$$h_1^{(2)}(kr) = -\left[1 - \frac{j}{kr} \right] \frac{e^{-jkr}}{kr} \; , \qquad\qquad \text{(12)}$$

while the first Legendre polynomial and its derivative are given by

$$P_1 = \cos \theta \; , \qquad\qquad \text{(13)}$$

$$\overset{\bullet}{P}_1 = -\sin \theta \; . \qquad\qquad \text{(14)}$$

Using equations (12) to (14), the leading terms of H_ϕ, E_θ, and E_r in the far field ($kr \gg 1$) become

$$H_{\hat{r}} = (-b_1 \overset{\bullet}{P}_1) \frac{e^{-jkr}}{kr} \; , \qquad\qquad \text{(15)}$$

$$E_\theta = Z_o (-b_1 \overset{\bullet}{P}_1) \frac{e^{-jkr}}{kr} = Z_o H_\theta \; , \qquad\qquad \text{(16)}$$

$$E_r = jZ_o (-2b_1 P_1) \frac{e^{-jkr}}{(kr)^2} \quad . \qquad\qquad \text{(17)}$$

Examination of equations (15) to (17) shows that for practical purposes a determination of b_1 will be sufficient to determine the fields in the test volume.

After some mathematical manipulation it can be shown that the interior fields, valid in the region $\theta_0 \le \theta \le \pi - \theta_0$, can be written in the form

$$H_\phi = \frac{I_0(r)}{2\pi r \sin\vartheta} + \frac{1}{2\pi} \sum_\mu a_\mu j_\mu(kr) \overset{\bullet}{T}_\mu(\cos \theta) \; , \qquad\qquad \text{(18)}$$

$$E_r = \frac{jZ_0}{2\pi kr} \sum_u u(u+1) \, a_u j_u(kr) T_u(\cos\theta) \; , \tag{19}$$

$$E_\theta = \frac{Z_0 V_0(r)}{Z_c 2\pi r \sin\theta} + \frac{jZ_0}{2\pi kr} \sum_u a_u \frac{d}{dr}[rj_u(kr)] \dot{T}_u(\cos\theta) \; , \tag{20}$$

where

$$T_u = \frac{1}{2}\left[P_u(\cos\theta) - P_u(-\cos\theta) \right] \; , \tag{21}$$

$$\dot{T}_u = dT_u/d\theta \; , \tag{22}$$

$$I_0(r) = \frac{V_0(L)}{Z_c}\left[j\sin k(L-r) + Y_t Z_c \cos k(L-r) \right] \; , \tag{23}$$

$$V_0(r) = V_0(L)\left[\cos k(L-r) + jY_t Z_c \sin k(L-r) \right] \; , \tag{24}$$

$$Z_c = \frac{Z_0 \ln \cot \dfrac{\theta_0}{2}}{\pi} = \text{characteristic impedance of bicone} \; , \tag{25}$$

$j_u(kr)$ is the spherical Bessel function, and the a_u's are constants, which, like the b_N's of the exterior region, are to be determined from the solution to the problem. The terminating admittance Y_t is likewise determined from the solution.

In contrast to equations (7) to (9), in which the summation index is defined, the values of u in equations (18) to (20) are determined from the boundary condition in the antenna region. In the absence of resistive loading we require that

$$E_r(\theta_0) = E_r(\pi - \theta_0) = 0 \; . \tag{26}$$

Based on equation (19), the specific values of u which will satisfy equation (26) are solutions of the equation

$$T_u(\cos\theta_0) = T_u\big(\cos(\pi-\theta_0)\big) = 0 \; , \tag{a}$$

which reduce to $\tag{27}$

$$P_u(\cos\theta_0) - P_u(-\cos\theta_0) = 0 \; . \tag{b}$$

6

The P_u's of equation (27) are not Legendre polynomials, but are Legendre functions since u is not generally an integer. Appropriate analytical expressions for P_u that are necessary to solve equation (27), and hence determine the values of u, can be found in Schelkunoff [6], Abramowitz and Stegor [8], and Erdélyi et al [9]. For the time being we simply assume that equation (27) has been solved and the values of u determined. Thus, the summation index of equations (18) to (20) is defined.

The complete solution to the problem is now found by matching the boundary conditions at $r = L$. Using equation (23) we have

$$I_0(L) = Y_t V_0(L) \; , \tag{28}$$

which when inserted in equation (18) gives

$$H_\phi(r = L) = \frac{Y_t V_0(L)}{2\pi L \sin \theta} + \frac{1}{2\pi} \sum_{u'} a_{u'} \dot{j}_{u'}(kL) \dot{T}_{u'}(\cos \theta) \; . \tag{29}$$

Multiplying both sides of equation (29) by $\sin \theta \, \dot{T}_{u'}(\cos \theta)$ and integrating from θ_0 to $\pi - \theta_0$ gives

$$a_u = \frac{2\pi}{N_u j_u(kL)} \int_{\theta_0}^{\pi - \theta_0} \sin \theta H_\phi(r = L) \dot{T}_u(\cos \vartheta) \, d\theta \; , \tag{30}$$

where we have used the normalization

$$\int_{-\theta_0}^{\pi - \theta_0} \sin \theta \dot{T}_u(\cos \theta) \dot{T}_{u'}(\cos \theta) \, d\theta = \begin{cases} 0 \text{ if } u \neq u' \\ N_u \text{ if } u = u' \end{cases} \; . \tag{31}$$

Equation (31) is a general property of the Legendre functions which satisfies the boundary condition of equation (27), with N_u being the associated normalization constant.

Equation (30) provides a connection between the a_u's and the b_N's through substitution of equation (7). We have

$$a_u = \sum_{N=1}^{\infty} \alpha_{uN} b_N \; , \tag{32}$$

where

$$\alpha_{uN} = \frac{h_N^{(2)}(kL)}{N_u j_u(kL)} \int_{\theta_0}^{\pi - \theta_0} \sin \theta \, \dot{T}_u(\cos \theta) \, \dot{P}_N(\cos \theta) \, d\theta \; . \tag{33}$$

7

We should also recall in passing that the functional form of H_ϕ and E_θ, as given by equations (18) and (20), respectively, ensures that for both exterior and interior regions the following conditions will be satisfied:

$$H_\phi(\theta) = H_\phi(\pi - \theta) \quad , \qquad \text{(a)}$$

$$E_\theta(\theta) = E_\theta(\pi - \theta) \quad . \qquad \text{(b)} \qquad (34)$$

If we now define a_u and b_N to be the components of column vectors $\hat{a}$ and $\hat{b}$, respectively, and α_{uN} to be the elements of a matrix $\tilde{A}$, we can write equation (32) in the compact matrix form

$$\hat{a} = \tilde{A}\hat{b} \quad . \qquad (35)$$

The second relationship between the a_u's and b_N's is obtained by requiring continuity of E_θ at the boundary. From equation (9) we have

$$LE_\theta(r = L) = \frac{jZ_0}{2\pi k} \sum_{N=1}^{\infty} b_N G_N(kL) \dot{P}_N(\cos \theta) \quad , \qquad (36)$$

where

$$G_N(kL) = \left\{ \frac{d}{dr} \left[r h_N^{(2)}(kr) \right] \right\}_{r=L} \quad . \qquad (37)$$

Multiplying both sides of equation (36) by $\sin \theta \, \dot{P}_N(\cos \theta)$ and integrating from 0 to π gives

$$b_N = \frac{2N(N + 1)}{2N + 1} \frac{2\pi k}{jZ_0 G_N(kL)} \int_0^\pi \sin \theta \, LE_\theta(r = L) \, \dot{P}_N(\cos \theta) \, d\theta \quad , \qquad (38)$$

where we have used the relationship

$$\int_0^\pi \sin \theta \, d\theta \, P_N(\cos \theta) \, P_{N'}(\cos \theta) = \begin{cases} \dfrac{2N + 1}{2N(N + 1)} & \text{if } N = N' \\ 0 & \text{if } N \neq N' \end{cases} \quad . \qquad (39)$$

Using equation (20) applied for $r = L$ in equation (38) yields

$$b_N = \sum_u \beta_{Nu} \, a_u + K_N \frac{V_0(L)}{Z_c} \quad , \qquad (40)$$

8

where the relevant constants are defined as follows:

$$\beta_{Nu} = \frac{2N(N+1)}{2N+1} \frac{F_u(kL)}{G_N(kL)} \int_{\theta_0}^{\pi-\theta_0} \sin\theta \, \dot{P}_N(\cos\theta) \, \dot{T}_u(\cos\theta) \, d\theta \quad , \tag{41}$$

$$K_N = -j \frac{4N(N+1)}{2N+1} \frac{k}{G_N(kL)} P_N(\cos\theta_0) \quad , \tag{42}$$

$$F_u(kL) = \left\{ \frac{d}{dr} \left[r j_u(kr) \right] \right\}_{r=L} \quad . \tag{43}$$

The derivation of equation (40) was based on the requirement that $E_\theta (r = L) = 0$ when θ lies outside the limits $\theta_0 \leq \theta \leq \pi - \theta_0$.

By identifying K_N as the N^{th} component of the column vector $\hat{K}$ and β_{Nu} as the element of the matrix $\tilde{B}$, we can recast equation (40) in the form

$$\hat{b} = \tilde{B}\hat{a} + \left(V_0(L)/Z_c\right)\hat{K} \quad . \tag{44}$$

The termination impedance, Y_t, can now be determined from equations (35), (44), (29), and (7). This is accomplished by first integrating equation (29) from θ_0 to $\pi - \theta_0$. We have

$$Y_t = \frac{Z_0 L}{Z_c V_0(L)} \int_{\theta_0}^{\pi-\theta_0} H_\phi (r = L) \, d\theta \quad . \tag{45}$$

We now substitute equation (7) into equation (45) to obtain

$$Y_t = \frac{-Z_0 L}{Z_c V_0(L)} \frac{1}{\pi} \sum_{N=1}^{\infty} b_N h_N^{(2)}(kL) P_N(\cos\theta_0) \quad . \tag{46}$$

The foregoing expression can also be cast in matrix form by introducing the transpose of the column vector $\hat{\xi}$ whose components are $h_N^{(2)}(kL) P_N(\cos\theta_0)$. Thus, we write equation (46) in the form

$$Y_t = \frac{-Z_0 L}{Z_c V_0(L)} \frac{1}{\pi} \hat{\xi}^T \hat{b} \quad , \tag{47}$$

where $\hat{\xi}^T$ is the transpose of $\hat{\xi}$ and is a row vector.

9

In an actual computation we will truncate the series for u and the series for N after a finite number of terms. However, the maximum number of terms used in the respective series may differ since the number of terms required to describe the fields in the interior and exterior regions may not be the same. This does not place any restriction on the theory or the method of solution. It is convenient in this report to conceptually regard the u and N series as being truncated after the same number of terms, say $\bar{n}$. Let us assume that this is done so that $\tilde{A}$ and $\tilde{B}$ are now $\bar{n} \times \bar{n}$ matrices and $\hat{a}$, $\hat{b}$, $\hat{K}$, and $\hat{\xi}$ are $\bar{n}$-dimensional vectors. We now substitute equation (35) into equation (44) to obtain

$$\tilde{U} \hat{b} = \frac{V_0(L)}{Z_c} \hat{K} \quad , \tag{48}$$

where $\tilde{U}$ is the matrix

$$\tilde{U} = \tilde{I} - \tilde{B} \tilde{A} \quad , \tag{49}$$

and $\tilde{I}$ is the identity matrix. The solution of equation (48) is

$$\hat{b} = \frac{V_0(L)}{Z_c} \tilde{U}^{-1} \hat{K} \quad , \tag{50}$$

where $\tilde{U}^{-1}$ is the inverse of $\tilde{U}$.

Substituting equation (50) into equation (47) gives the following expression for the admittance:

$$Y_t = \frac{-Z_0 L}{Z_c^2 \pi} \hat{\xi}^T \tilde{U}^{-1} \hat{K} \quad . \tag{51}$$

Examination of the terms of equation (51) shows that Y_t is a function of the bicone angle θ_0, radial dimension L, and wavenumber (frequency) k. For specified values of L and θ_0, the admittance can be expressed as a function of frequency ω.

Once $Y_t(\omega)$ is determined from equation (51), the remaining calculation proceeds as follows: We initially determine $V_0(L)$ from a knowledge of the source voltage $V_0(0)$. Using equation (24) we have

$$V_0(L) = (\cos kL + j Y_t Z_c \sin kL)^{-1} V_0(0) \quad . \tag{52}$$

Substituting equation (52) into equation (50) gives $\hat{b}$, and the external fields are then determined from equation (7).

10

3. SOLUTION WITH RESISTIVE LOADING

The deduction of the solution with resistive loading is not an obvious extension of the lossless case. A fundamental aspect of the lossless case was that the interior fields were made up of modes with index u determined from the solution of the interior boundary condition

$$E_r(\theta_0) = E_r(\pi - \theta_0) = 0 \quad . \tag{53}$$

This led to equation (27) and the determination of the values of u.

When resistive loading is considered, the new boundary condition at the walls becomes

$$E_r(\theta_0) = E_r(\pi - \theta_0) = Z_\omega(r) I_\omega(r) \tag{54}$$

where $I_\omega(r)$ is the wall current and $Z_\omega(r)$ is the surface impedance. The wall current is given by

$$I_\omega(r) = 2\pi r \sin \theta_0 H_\phi(\theta_0) \quad . \tag{55}$$

The existence of resistive losses requires modification of the functional form of the fields in the interior region. In the absence of resistive loading, the interior fields are given by equations (18) to (20) with the assumed noninteger values of u being determined from the solution of equation (27).

When the boundary condition of equation (54) replaces that of equation (53) because of resistive loading, the structure of the fields given by equations (18) to (20) does not appear to be sufficient in itself to solve the problem. I have not been able to find a means to uniquely determine the values of u that satisfy equation (54) and the other boundary conditions using the field representation of equations (18) to (20).

It appears, however, that a unique solution to the problem can be obtained if one adds to the field components of equations (18) to (20) additional terms involving integer values of the summation index, which are also solutions of the basic equations in the antenna region. These terms are necessary to satisfy the boundary condition of equation (54) and do not exist in the lossless case.

The deduction of the θ dependence of equations (18) to (20) was based on the fact that the two linearly independent solutions for H_ϕ in the θ dimension are derivatives of

Legendre functions of the first and second kind, $P_\upsilon(\cos \theta)$ and $Q_\upsilon(\cos \theta)$, respectively [6-9]. In the condition where

$$\upsilon = u \neq \text{integer} \ , \tag{56}$$

the function Q_u satisfies the equation

$$Q_u(\cos \theta) = P_u(-\cos \theta) \ . \tag{57}$$

Using the result

$$\cos(\pi - \theta) = -\cos \theta \ , \tag{58}$$

combined with equation (57) and the symmetry requirement

$$H_\phi(\pi - \theta) = H_\phi(\theta) \ , \tag{59}$$

led to the choice of

$$T_u = \frac{1}{2} (P_u - Q_u) = \frac{1}{2} \left[P_u (\cos \theta) - P_u (-\cos \theta) \right] \tag{60}$$

as the only candidate θ-dependent solution (compare equation (21)).

When we allow υ to be an integer, the θ-dependent part of the solution changes as follows. For the case where

$$\upsilon = N = \text{integer} \ ,$$

we have

$$P_N(\cos \theta) = \sum_{q=0}^{N} \frac{(-1)^q (N+q)!}{(N-q)!(q!)^2} \sin^{2q} \left(\frac{\theta}{2}\right) , \tag{61}$$

$$Q_N(\cos \theta) = P_N(\cos \theta) \ln\left(\cot\frac{\theta}{2}\right) - \sum_{m=1}^{N} \frac{P_{N-m}P_{m-1}}{m} \ . \tag{62}$$

Using the foregoing equations we easily see that

$$P_N(-\cos \theta) = (-1)^N P_N(\cos \theta) \ , \tag{63}$$

$$Q_N(-\cos \theta) = (-1)^{N+1} Q_N(\cos \theta) \ . \tag{64}$$

Employing the symmetry condition of equation (59) requires that only odd powers of N be used for the P_N terms and even powers of N for the Q_N terms.

When integer terms are added to equations (18) to (20), the expressions for the fields can be written in the form

$$H_\phi = \frac{I_0\,(r)}{2\pi r \sin \theta} + \frac{1}{2\pi} \sum_u a_u j_u\,(kr)\,\overset{\bullet}{T}_u\,(\cos\,\theta) + \frac{1}{2\pi} \sum_m \bar{a}_m j_m\,(kr)\,\overset{\bullet}{\Gamma}_m(\cos\,\theta) \ , \qquad (65)$$

$$E_r = \frac{jZ_0}{2\pi kr} \sum_u u\,(u+1)\,a_u j_u\,(kr)\,T_u(\cos\,\theta) + \frac{jZ_0}{2\pi kr} \sum_m m(m+1)\,\bar{a}_m j_m(kr)\,\Gamma_m\,(\cos\,\theta) \ , (66)$$

$$E_\theta = \frac{Z_0 V_0\,(r)}{Z_c 2\pi r \sin\theta} + \frac{jZ_0}{2\pi kr} \sum_u a_u F_u(kr)\,\overset{\bullet}{T}_u\,(\cos\,\theta) + \frac{jZ_0}{2\pi kr} \sum_m \bar{a}_m F_m(kr)\,\overset{\bullet}{\Gamma}_m\,(\cos\,\theta) \ , (67)$$

where

$$F_u(kr) = \frac{d}{dr}\left[r j_u(kr)\right] \ , \qquad (68)$$

$$F_m(kr) = \frac{d}{dr}\left[r j_m(kr)\right] \ , \qquad (69)$$

$$\Gamma_m(\cos\,\theta) = P_m(\cos\,\theta) \quad \text{if} \quad m = \text{odd} \ , \qquad \text{(a)}$$

$$\Gamma_m(\cos\,\theta) = Q_m(\cos\,\theta) \quad \text{if} \quad m = \text{even} \ , \qquad \text{(b) (70)}$$

and the $\bar{a}_m$'s are additional constants to be determined from the problem in the resistively loaded case. The index m is an integer.

We assume that at the boundary $\theta = \theta_0$. In addition, we continue to retain the equation

$$T_u\,(\cos\,\theta_0) = 0 \ , \qquad (71)$$

so that the noninteger values of u remain unchanged, and hence are known.

The relationship between the $\bar{a}_m$'s and $\bar{a}_u$'s is determined from the boundary condition of equation (54). Using equations (23) and (55) we have

$$Z_\omega\left[jV_o\,(L)Z_c^{-1} \sin k\,(L-r) + V_o(L)Y_t \cos k(L-r)\right]$$

13

$$+ \left[Z_\omega r \sin \theta_0 \times \sum_v a_v j_u(kr) \dot{T}_u(\cos \theta_0) \right] + Z_\omega r \sin \theta_0 \sum_m \bar{a}_m j_m \dot{\Gamma}_m(\cos \theta_0) =$$

$$\frac{jZ_0}{2\pi kr} \sum_m m(m+1) \, \bar{a}_m j_m(kr) \Gamma_m(\cos \theta_0) \quad . \tag{72}$$

There does not appear to be a simple way to relate the $\bar{a}_m$'s to the a_u's, but it can be accomplished in matrix form by assuming that in the region

$$0 \leq r \leq L , \tag{73}$$

we can expand all the r-dependent functions in an orthonormal basis using a complete (and as yet unspecified) set of functions $\phi_n(r)$ which satisfy the standard conditions

$$\int_0^L \phi_n(r) \phi_m(r) \, dr = \delta_{mn} \quad , \tag{74}$$

where n and m are integers and δ_{mn} is the Kronecker delta.

The aforementioned procedure is accomplished by (1) multiplying both sides of equation (72) by r, (2) setting

$$\gamma(r) = Z_\omega/Z_0 \quad ,$$

and (3) using the following relationships:

$$r\gamma \sin k(L-r) = \sum_{n=0}^\infty d_n \phi_n(r) \quad , \tag{75}$$

$$r\gamma \cos k(L-r) = \sum_{n=0}^\infty f_n \phi_n(r) \quad , \tag{76}$$

$$\gamma r^2 j_u(kr) = \sum_{n=0}^\infty g_{nu} \phi_n(r) \quad , \tag{77}$$

$$\gamma r^2 j_m(kr) = \sum_{n=0}^\infty g_{nm} \phi_n(r) \quad , \tag{78}$$

14

$$j_m(kr) = \sum_{n=0}^{\infty} h_{nm}\phi_n(r) \quad , \tag{79}$$

where the d_n's, f_n's, g_{nu}'s, g_{nm}'s, and h_{nm}'s are constants determined from the orthogonality condition of equation (74). For example,

$$g_{nm} = \int_0^L r^2 j_m(kr)\phi_n(r)\, dr \quad . \tag{80}$$

Since the ϕ_n's form a complete set, the substitution of equations (75) to (79) into equation (72) yields

$$jV_0(L)Z_c^{-1} d_n + V_0(L)Y_t f_n + \sin \theta_0 \sum_u g_{nu}\overset{\bullet}{T}_u(\cos \theta_0)a_u$$

$$+ \sin \theta_0 \sum_m g_{nm}\overset{\bullet}{\Gamma}_m (\cos \theta_0)\, \bar{a}_m = \frac{j}{2\pi k} \sum_m m(m+1)h_{nm}\bar{a}_m \quad . \tag{81}$$

By defining d_n, f_n, a_u, and $\bar{a}_m$ to be components in the same dimensional vector space, we can cast equation (81) in the matrix form

$$jV_0(L)\, Z_c^{-1}\hat{d} + V_0(L)Y_t \hat{f} + \tilde{G}\hat{a} + \tilde{\tilde{G}}\, \overset{\wedge}{\bar{a}} = \tilde{\tilde{H}}\, \overset{\wedge}{\bar{a}} \quad , \tag{82}$$

where

$$\tilde{G}_{nu} = \sin \theta_0 g_{nu}\overset{\bullet}{T}_u(\cos \theta_0) \quad , \tag{a}$$

$$\tilde{\tilde{G}}_{nm} = \sin \theta_0 g_{nm}\overset{\bullet}{\Gamma}_m(\cos \theta_0) \quad , \tag{b} \tag{83}$$

$$\tilde{\tilde{H}}_{nm} = \frac{j}{2\pi k}\,(m)\,(m+1)h_{nm} \quad , \tag{c}$$

The solution of equation (82) which renders $\overset{\wedge}{\bar{a}}$ in terms of $\hat{a}$ is given by

$$\overset{\wedge}{\bar{a}} = \tilde{V}\,\hat{a} + j\, V_0(L)\, Z_c^{-1}\hat{\lambda} + V_0(L)\, Y_t\hat{\eta} \quad , \tag{84}$$

where

$$\tilde{V} = \left(\tilde{\tilde{H}} - \tilde{\tilde{G}}\right)^{-1} \tilde{\tilde{G}} \quad , \tag{85}$$

$$\hat{\lambda} = \left(\tilde{\tilde{H}} - \tilde{\tilde{G}}\right)^{-1} \hat{d} \quad , \tag{86}$$

$$\hat{\eta} = \left(\tilde{\tilde{H}} - \tilde{\tilde{G}}\right)^{-1} \hat{f} \quad . \tag{87}$$

Using equation (84), the determination of the admittance Y_t and the constants $\hat{a}, \hat{\bar{a}}$, and $\hat{b}$ follows in a manner analogous to the lossless case considered in the previous section (compare the analysis beginning with eq (28)). For brevity, some of the obvious intermediate steps will be omitted. From equation (65) we have

$$H_\phi(r = L) = \frac{Y_t V_0(L)}{2\pi L \sin \theta} + \frac{1}{2\pi} \sum_u a_u j_u(kL) \dot{T}_u(\cos \theta) + \frac{1}{2\pi} \sum_m \bar{a}_m j_m(kL) \dot{\Gamma}_m(\cos \theta) \tag{88}$$

If we now multiply equation (88) by $\sin \theta \, \dot{T}_u(\cos \theta)$ and integrate from θ_0 to $\pi - \theta_0$, and then use equation (7) for $H_\phi(r = L)$, we obtain the following result:

$$\hat{a} = \bar{A} \hat{b} - \tilde{\Omega} \hat{\bar{a}} \tag{89}$$

where $\bar{A}$ is the previously defined matrix, and $\tilde{\Omega}$ is a matrix whose components are

$$\Omega_{\mu m} = \frac{j_m(kL)}{N_u j_u(kL)} \int_{\theta_0}^{\pi - \theta_0} \sin \theta \, \dot{T}_u(\cos \theta) \, \dot{\Gamma}_m(\cos \theta) \, d\theta \quad . \tag{90}$$

From equation (38) we have the relationship which relates b_N to the interior fields. However, we must now use equation (67) for E_θ. Inserting equation (67) into (38) gives

$$b_N = \sum_u \beta_{N\mu} a_u + K_N V_o(L) Z_c^{-1} + \sum_m \bar{\beta}_{Nm} \bar{a}_m \quad , \tag{91}$$

where

$$\bar{\beta}_{N\mu} = \frac{2N(2N + 1)}{2N + 1} \frac{F_m(kL)}{G_N(kL)} \int_{\theta_0}^{\pi - \theta_0} \sin \theta \dot{P}_N(\cos \theta) \dot{\Gamma}_m(\cos \theta) \, d\theta \quad . \tag{92}$$

16

It is observed that equation (91) is similar in mathematical structure to equation (40); the matrix equivalent becomes

$$\hat{b} = \tilde{B}\,\hat{a} + K_N V_0(L)\,Z_c^{-1} + \tilde{\tilde{B}}\,\hat{\bar{a}} \quad , \tag{93}$$

which is likewise analogous to equation (44). $\tilde{\tilde{B}}$ is the matrix whose elements are given by equation (92).

The final required equation for determining the unknowns in the system is found by integrating equation (88) between θ_0 and $\pi - \theta_0$. There results

$$Y_t = \frac{-Z_0 L}{Z_c V_0(L)}\,\frac{1}{\pi}\,\hat{\xi}^T \hat{b} + \frac{Z_0 L}{Z_c V_0(L)}\,\frac{1}{\pi}\,\hat{\psi}^T\,\hat{\bar{a}} \quad , \tag{94}$$

where $\hat{\psi}$ is a column vector whose components are $j_m(kL)\Gamma_m(\cos\theta_0)$.

In summary, there are four unknowns in the problem: Y_t, $\hat{a}$, $\hat{b}$, and $\hat{\bar{a}}$. These are determined from equations (84), (89), (93), and (94). The simultaneous solution of these matrix equations involves many intermediate steps which for brevity are not presented. The final result is

$$Y_t = \frac{-\alpha\hat{\xi}^T\hat{X}_6 + \alpha\hat{\psi}^T\hat{X}_3 + j\alpha Z_c^{-1}\hat{\psi}^T\tilde{X}_4}{1 + \alpha\hat{\xi}^T\tilde{M}_1\hat{X}_5 - \alpha\hat{\psi}^T X_5} \quad , \tag{95}$$

where

$$\alpha = \frac{Z_0 L}{Z_c} \quad , \tag{a}$$

$$\hat{X}_1 = (\tilde{I} - \tilde{B}\tilde{A})^{-1}\hat{K}Z_c \quad , \tag{b}$$

$$\hat{X}_2 = \tilde{A}X_1 \quad , \tag{c}$$

$$\tilde{M}_1 = (\tilde{I} - \tilde{B}\tilde{A})^{-1}(\tilde{\tilde{B}} - \tilde{B}\,\tilde{\Omega}) \quad , \tag{d}$$

$$\tilde{M}_2 = \tilde{A}\tilde{M}_1 - \tilde{\Omega} \quad , \tag{e}$$

$$\hat{X}_3 = (\tilde{I} - \tilde{V}\tilde{M}_2)^{-1}\tilde{V}\hat{X}_2 \quad , \tag{f}$$

$$\hat{X}_4 = (\bar{I} - \bar{V}\tilde{M}_2)^{-1}\hat{\lambda} , \qquad \text{(g)}$$

$$\hat{X}_5 = (\bar{I} - \bar{V}\tilde{M}_2)^{-1}\hat{\eta} , \qquad \text{(h)}$$

$$\hat{X}_6 = \hat{X}_1 + \tilde{M}_1\hat{X}_3 + jZ_c^{-1}\tilde{M}_1\hat{X}_4 . \qquad \text{(i)} \qquad \text{(96)}$$

Once Y_t is computed, the other parameters, $\hat{a}, \hat{b},$ and $\hat{\bar{a}},$ are determined from equations (84), (89), (90), and (94).

4. CONCLUSION

In this study we have demonstrated that a methodology for calculating the fields of a biconical antenna with resistive loading is theoretically and computationally feasible. The technique draws on the modal analysis concept originally developed by Schelkunoff for the case without resistive loading. However, the extension to the resistively loaded case is considerably more complex from both a conceptual and computational viewpoint.

The resistively loaded case is found to require the existence of additional terms in the antenna region (compared to the lossless case) so that the interior boundary condition is satisfied. The solution of the interior boundary value equation appears to require the introduction of an orthogonal basis of functions, $\phi_n(r)$, defined in the range $0 \le r \le L$, where r is the radial coordinate and L is the bicone radius. We have not as yet selected the $\phi_n(r)$; however, this does not limit the theoretical analysis. Using the basis functions, $\phi_n(r)$, a matrix formulation is developed. In order to achieve a practical solution to the problem, it will be necessary to assume a finite number of terms. This number has not been determined, but will surely depend on the bicone angle θ_o and radius L, and the magnitude and radial distribution of the resistive loading.

In summary, the implementation of the technique developed in this investigation requires the selection of $\phi_n(r)$ and the evaluation of certain mathematical functions and integrals which depend on $\phi_n(r)$. When this is accomplished it should be a relatively easy matter to predict the near and far fields from a resistively loaded biconical antenna.

18

5. REFERENCES

1. S. A. Schelkunoff, "Theory of Antennas of Arbitrary Size and Shape," *Proc. I.R.E.* **29** (1941), 493-521.

2. C. T. Tai, "On the Theory of Biconical Antennas," *J. Appl. Phys.* **19**, (1948) 1155-1160.

3. J. D. Kraus, *Antennas*, McGraw-Hill, New York, N.Y. (1950).

4. P. D. P. Smith, "The Conical Dipole of Wide Angle," *J. Appl. Phys.* **19** (1948), 11-23.

5. C. T. Tai, "Application of a Variational Principal to Biconical Antennas," *J. App. Phys.* **20** (1949), 1076-1084 .

6. S. A. Schelkunoff, *Advanced Antenna Theory*, John Wiley & Sons, New York (1952).

7. J. A. Kong, *Electromagnetic Wave Theory*, John Wiley & Sons, New York (1986).

8. M. Abramowitz and I. Stegun, *Handbook of Mathematical Functions*, Appl. Math. Ser. 55, U.S. Government Printing Office, Washington, D.C. (1964).

9. A. Erdélyi, W. Magnus, F. Oberhettinger, and F.G. Tricomi, *Higher Transcendental Functions*, Vol. I, McGraw-Hill, New York (1953).

10. W. Magnus and F. Oberhettinger, *Formulas and Theorems for the Functions of Mathematical Physics*, Chelsea Publishing Company, New York (1949).

11. W. Press, B. P. Flannery, S. A. Teukolsky, and W. T. Vetterling, *Numerical Recipes: The Art of Scientific Computing*, Cambridge University Press (1986).

ACKNOWLEDGEMENT

APPENDIX: DETERMINATION OF THE ROOTS u_i AND EIGENFUNCTIONS T_{u_i}

FIGURES

TABLES

22

APPENDIX: DETERMINATION OF THE ROOTS u_i AND EIGENFUNCTIONS T_{u_i}

In this appendix I address the determination of the roots u_i of the equation

$$T_{u_i}(\cos\,\theta_0) = \frac{1}{2}\left[P_{u_i}(\cos\,\theta_0) - P_{u_i}(-\cos\,\theta_0)\right] = 0 \quad, \tag{A-1}$$

where P_{u_i} is the Legendre function of order u_i, and θ_0 is the bicone angle of figure 1 in the body of the report. I also discuss the determination of the θ-dependence of the function

$$T_{u_i}(\cos\,\theta) = \frac{1}{2}\left[P_{u_i}(\cos\,\theta) - P_{u_i}(-\cos\,\theta)\right] \quad. \tag{A-2}$$

Letting

$$z_0 = \cos\,\theta_0 \quad, \tag{A-3}$$

we write equation (A-1) in the form

$$\frac{1}{2}\left[P_{u_i}(z_0) - P_{u_i}(-z_0)\right] = 0 \quad. \tag{A-4}$$

Since u_i is not generallly an integer, the complete series expansion for P_u must be used. This series can be deduced from the hypergeometric function [1] through the relationship

$$P_u(z_0) = F\left(-u,\, u+1;\, 1;\, \frac{1-z_0}{2}\right) \quad, \tag{A-5}$$

which is valid in the range $|1 - z_0| < 2$. This latter requirement is satisfied for the angles of interest. The series formula for the hypergeometric function of equation (A-5) can be deduced from the general formula (compare chapter 15 of the reference).

$$F(a,\, b;\, c;\, z_0) = \sum_{n=0}^{\infty} \frac{(a)_n (b)_n}{(c)_n} \frac{z_0^n}{n!} \quad, \tag{A-6}$$

where $(a)_n$, $(b)_n$, and $(c)_n$ are Pochhammer symbols defined by the equation

$$(\xi)_n = \frac{\Gamma(\xi+n)}{\Gamma(\xi)} \quad, \tag{A-7}$$

with Γ being the gamma function.

23

Setting

$$a = -u \; , \qquad \text{(a)}$$

$$b = u + 1 \; , \qquad \text{(b)} \qquad \text{(A-8)}$$

$$c = 1 \; , \qquad \text{(c)}$$

and using the properties of the gamma function gives

$$(a)_n = (-u)(-u + 1)(-u + 2) \dots (-u + n - 1) \; , \qquad \text{(a)}$$

$$(b)_n = (u + 1)(u + 2) \dots (u + n) \; . \qquad \text{(b)} \qquad \text{(A-9)}$$

The resulting series expression for $P_u(z)$ is

$$P_u(z_0) = 1 + \sum_{n=1}^{\infty} \frac{(a)_n (b)_n}{(n!)^2} \frac{(1 - z_0)^n}{2^n} \; . \qquad \text{(A-10)}$$

When equation (A-10) and its counterpart for $P_u(-z_0)$ are inserted in equation (A-4), we have a polynomial of infinite order for the determination of the roots u_i. Since this is impossible to deal with, it is necessary to approximate $P_u(z_0)$ and $P_u(-z_0)$ by a finite number of terms.

In all cases equation (A-10) is a well-behaved representation of $P_u(z_0)$. Figures A-1 and A-2 show the behavior of $P_u(z_0)$ and $P_u(-z_0)$, respectively, for selected values of $z_0 = \cos \theta_0$ calculated from equation (A-10) using 128 terms in the summation and including double precision.

The need for double precision in the computation of $P_u(z_0)$ and $P_u(-z_0)$ arises from the oscillatory nature of the individual terms in the series, which can become extremely large for correspondingly large values of u. Thus, in the absence of double precision, we would be faced with large round-off errors resulting from the subtraction of sequences of two extremely large numbers. These uncertainties would be pronounced in the determination of the roots of equation (A-4). The use of double precision combined with 128 terms in the series of $P_u(z_0)$ and $P_u(-z_0)$ appears to circumvent the aforementioned problem.

For very large values of u, even 128 terms may not be sufficient to accurately compute $P_u(\pm z_0)$. Fortunately, in this case the roots of equation (A-4) may be determined using the asymptotic forms of $P_u(\pm z_0)$. The asymptotic expressions [2] for the Legendre functions also provide an excellent starting guess for the ZBRAC and RTBIS root finding algorithms [3] which are used to solve equation (A-6).
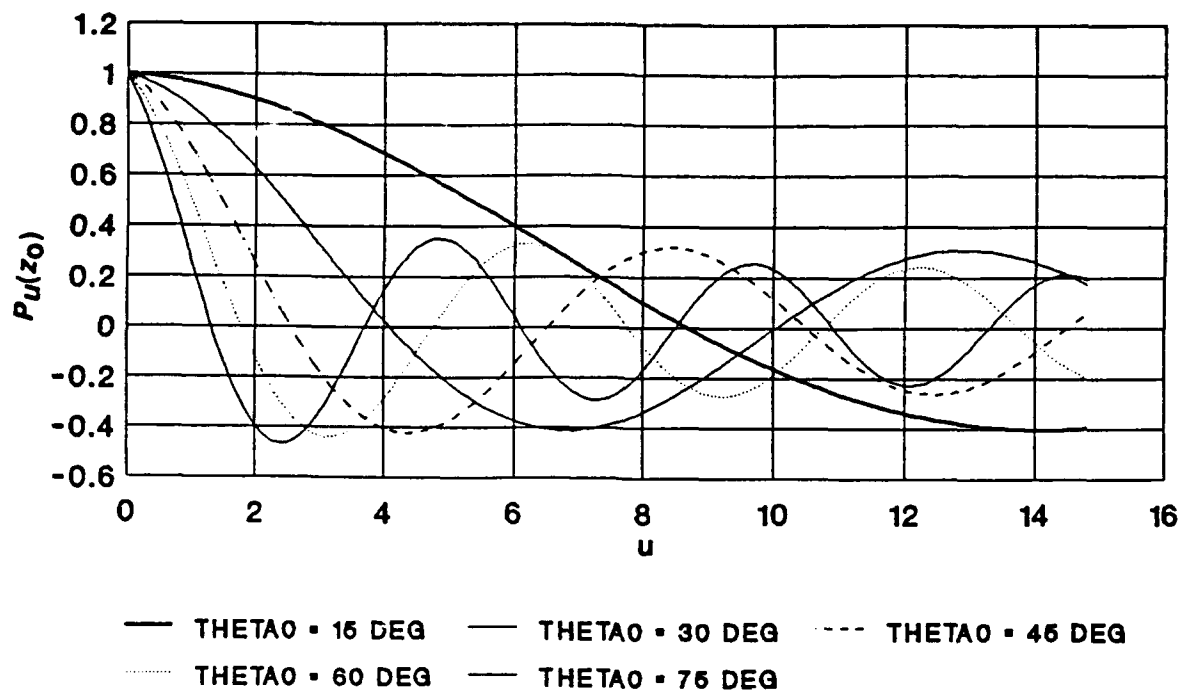
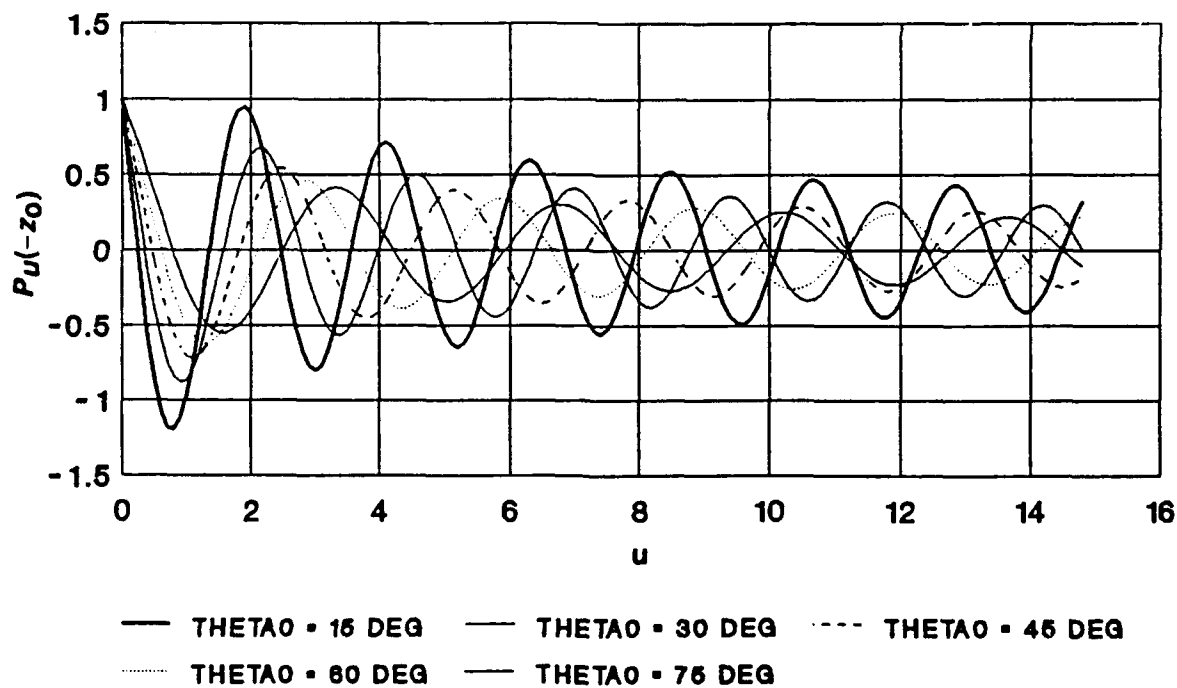**Figure A-1.** $P_u(z_0)$ as a function of u with z_0 as a parameter.

Figure A-2. $P_u(-z_0)$ as a function of u with z_0 as a parameter.

25

Several asymptotic expressions were examined, and the one which seems most appropriate for this investigation is that rendered by Magnus and Oberhettinger [2]. The asymptotic expression for the Legendre function of order u is denoted by $\bar{P}_u(\cos\theta)$ and is given by

$$\bar{P}_{u_i}(\cos\theta) = \sqrt{\frac{2}{\pi \bar{u}_i \sin\theta}}\ \cos\left[(u_i + \tfrac{1}{2})\,\theta - \frac{\pi}{4}\right]; \ (\varepsilon \leq \theta \leq \pi - \varepsilon,\ \varepsilon > 0,\ |u_i| >> \tfrac{1}{\varepsilon})\ . \quad \text{(A-11)}$$

Using equation (A-11) in equation (A-4) and recalling that

$$-z_0 = \cos(\pi - \theta_0) \quad \text{(A-12)}$$

gives the following equation for the asymptotic roots $\bar{u}_i$:

$$\cos\left[(\bar{u}_i + \tfrac{1}{2})\,\theta_0 - \frac{\pi}{4}\right] - \cos\left[(\bar{u}_i + \tfrac{1}{2})(\pi - \theta_0) - \frac{\pi}{4}\right] = 0\ . \quad \text{(A-13)}$$

Using the formula

$$\cos a - \cos b = -2\sin\left[\tfrac{1}{2}(a+b)\right]\sin\left[\tfrac{1}{2}(a-b)\right] \quad \text{(A-14)}$$

and letting

$$a = v_i \theta_0 - \frac{\pi}{4}\ , \qquad \qquad \text{(a)}$$

$$b = v_i(\pi - \theta_0) - \frac{\pi}{4}\ , \qquad \text{(b)} \qquad \text{(A-15)}$$

$$v_i = \bar{u}_i + \frac{1}{2}\ , \qquad \qquad \text{(c)}$$

reduces equation (A-13) to the form

$$\sin\left(\bar{u}_i \frac{\pi}{2}\right)\sin\left[v_i(\frac{\pi}{2} - \theta_0)\right] = 0\ . \quad \text{(A-16)}$$

Since we are looking for solutions where $\bar{u}_i$ is not an integer, the solution of equation (A-16) is given by

$$v_i\left(\frac{\pi}{2} - \theta_0\right) = m\pi\ , \quad \text{(A-17)}$$

where m is an integer. Letting

$$\phi_0 = \frac{\pi}{2} - \theta_0 \qquad \text{(A-18)}$$

gives

$$\bar{u}_i = \frac{m\pi}{\phi_0} - \frac{1}{2} \qquad \text{(A-19)}$$

As observed from equation (A-19), every angle θ_0 generates an infinite set of roots with magnitudes increasing with the index m. Table A-1 compares the asymptotic roots given by equation (A-19) and the exact roots determined from the numerical solution of equation (A-4).

The asymptotic values appear to provide a good approximation at the smaller values of u_i with excellent agreement occurring at the larger ones. This is consistent with the theoretical expectations.

Table A-1. Comparison between exact and asymptotic roots

θ_O (degrees)	Root no.	Asymptotic value, $\bar{u}_i$	Exact value u_i
15.0	1	1.90000	1.80156
15.0	2	4.30000	4.25625
15.0	3	6.70000	6.67405
15.0	4	9.10000	9.04312
15.0	5	11.5000	11.4272
30.0	1	2.50000	2.44524
30.0	2	5.50000	5.45228
30.0	3	8.50000	8.45644
30.0	4	11.5000	11.4999
30.0	5	14.5000	14.4999
45.0	1	3.50000	3.45397
45.0	2	7.50000	7.48620
45.0	3	11.5000	11.4812
45.0	4	15.5000	15.4990
45.0	5	19.5000	19.4997
60.0	1	5.50000	5.48263
60.0	2	11.5000	11.4999
60.0	3	17.5000	17.4993
60.0	4	23.5000	23.5000
60.0	5	29.5000	29.5001
75.0	1	11.5000	11.4870
75.0	2	23.5000	23.4998
75.0	3	35.5000	35.5005
75.0	4	47.5000	47.5000
75.0	5	59.5000	59.4999

It should be noted in passing that Schelkunoff also obtained estimates for the asymptotic roots [4] which agree with equation (A-19) only in the limit where $m\pi/\phi_0 \gg 1/2$. He did not attempt to generate numerical solutions relevant to our range of interest.

After the roots are determined it is also necessary to calculate the angular dependence of the function

$$T_{u_i}(\cos\,\theta) = \frac{1}{2}\left[P_{u_i}(\cos\,\theta) - P_{u_i}(-\cos\,\theta)\right] \qquad (A\text{-}20)$$

which from equation (A-4) is observed to satisfy the condition

$$T_{u_i}(\cos\,\theta_0) = T_{u_i}\left[\cos(\pi - \theta_0)\right] = T_{u_i}(-\cos\,\theta_0) = 0 \quad . \qquad (A\text{-}21)$$

Figures A-3 to A-7 show plots of $T_{u_i}(z = \cos\,\theta)$, $P_{u_i}(z = \cos\,\theta)$, and $P_{u_i}(-z = -\cos\,\theta)$ as a function of θ for the first five roots when $\theta_0 = 30°$. Using equation (A-10), we can compute the angular dependence of $T_{u_i}(z)$ from the expression

$$T_{u_i}(\cos\,\theta) = \frac{1}{2}\sum_{n=1}^{128}\frac{(a)_n\,(b)_n}{(n!)^2}\,\frac{1}{2^n}\left[(1 - \cos\,\theta)^n - (1 + \cos\,\theta)^n\right] \quad , \qquad (A\text{-}22)$$

where the $(a)_n$ and $(b)_n$ are calculated from equation (A-9) with the u_i's given in table A-1 for $\theta_0 = 30°$.

It is also of interest to examine the sensitivity of the behavior of $T_{u_i}(\cos\,\theta)$ to the choice of the asymptotic versus exact root as a function of θ_0. Figures A-8 to A-12 show the comparison between T_{u_i} and $T_{\bar{u}_i}$ for the first five modes when $\theta_0 = 30°$. As expected, the differences become smaller as m increases from 1 to 5.

Figure A-13 shows the comparison between the T_{u_i}'s for the smallest root, which occurs in the $\theta_0 = 15°$, $m = 1$ case. For this situation it is observed that the difference can become quite large, indicating that the asymptotic approximation is not especially good. On the other hand, figure A-14 shows the $\theta_0 = 75°$, $m = 1$ case, which corresponds to a relatively large root of 11.50 (compare table A-1). As observed from figure A-14 the differences in this case are imperceptible.
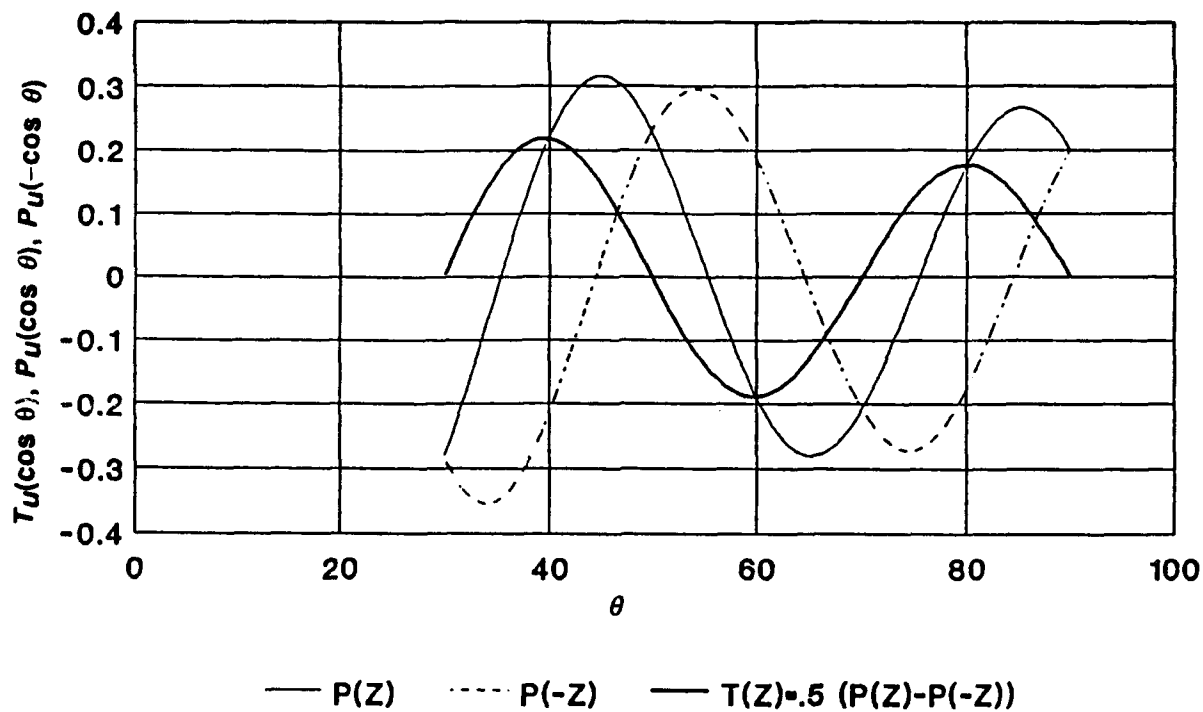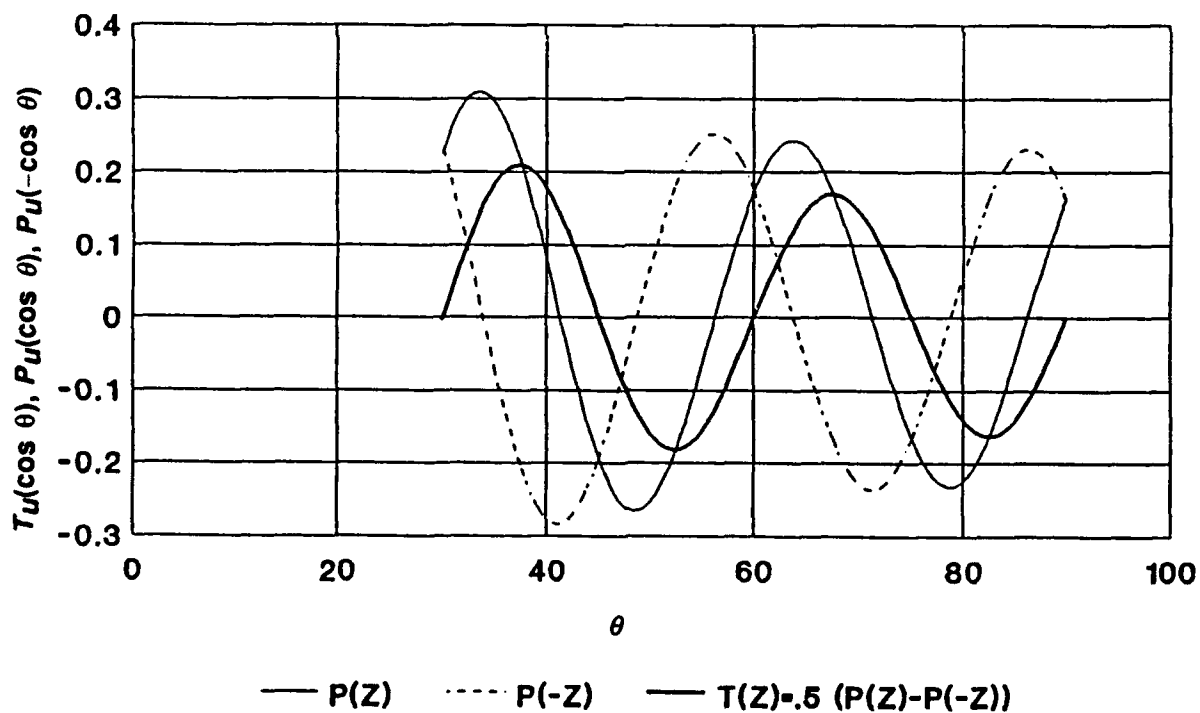
28
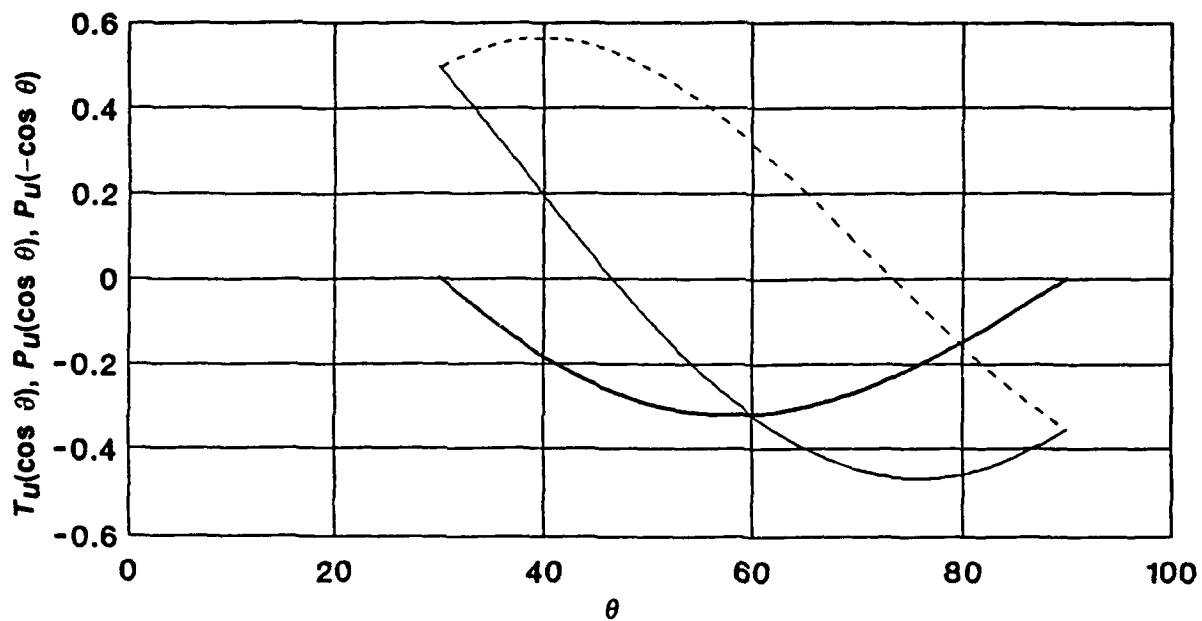
Figure A-3. $T_u(\cos\theta)$, $P_u(\cos\theta)$, and $P_u(-\cos\theta)$ as a function of θ for $\theta_0 = 30°$ and $m = 1$.
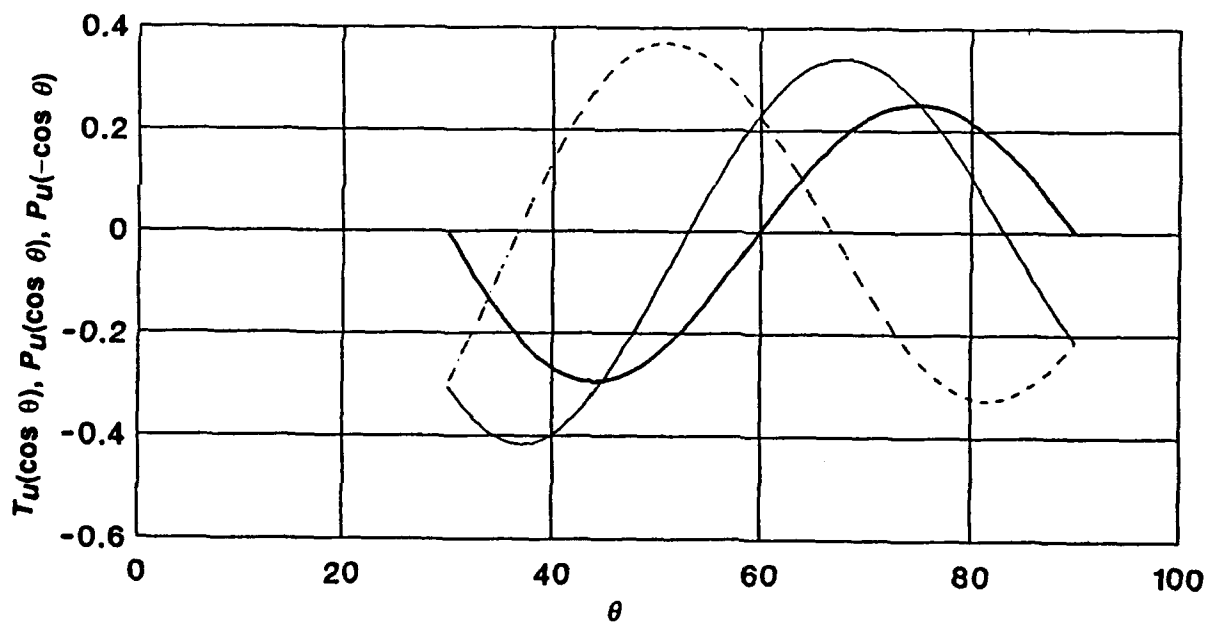
Figure A-4. $T_u(\cos\theta)$, $P_u(\cos\theta)$, and $P_u(-\cos\theta)$ as a function of θ for $\theta_0 = 30°$ and $m = 2$.
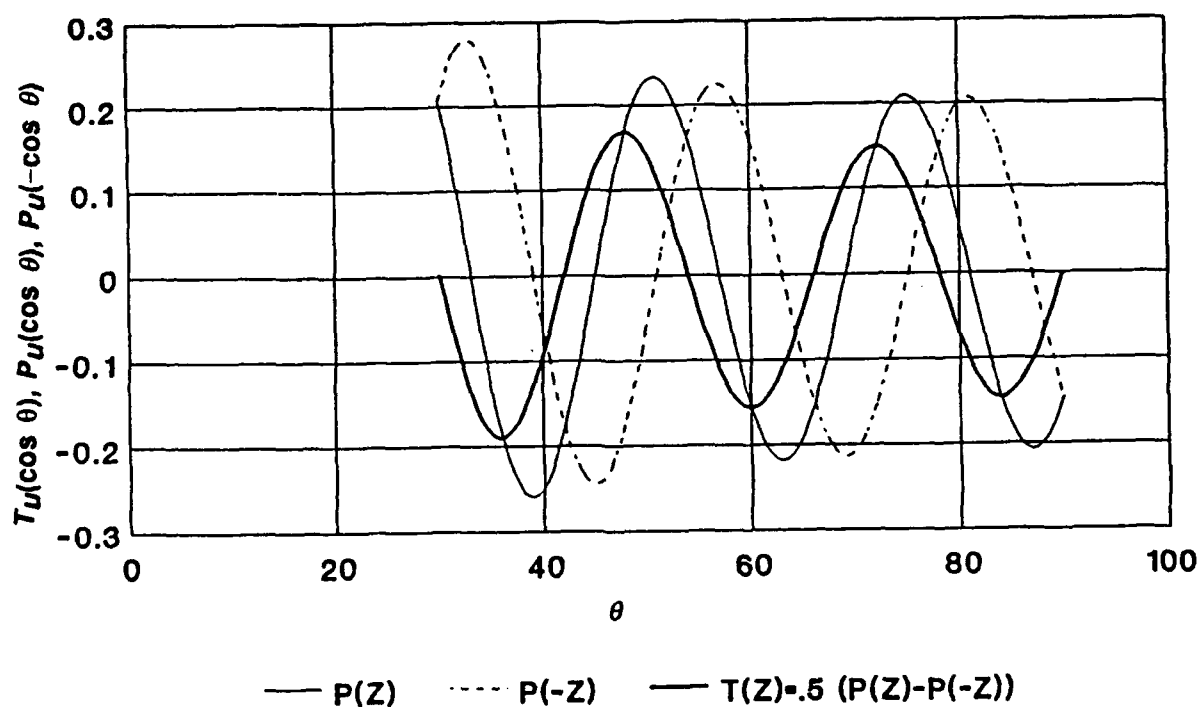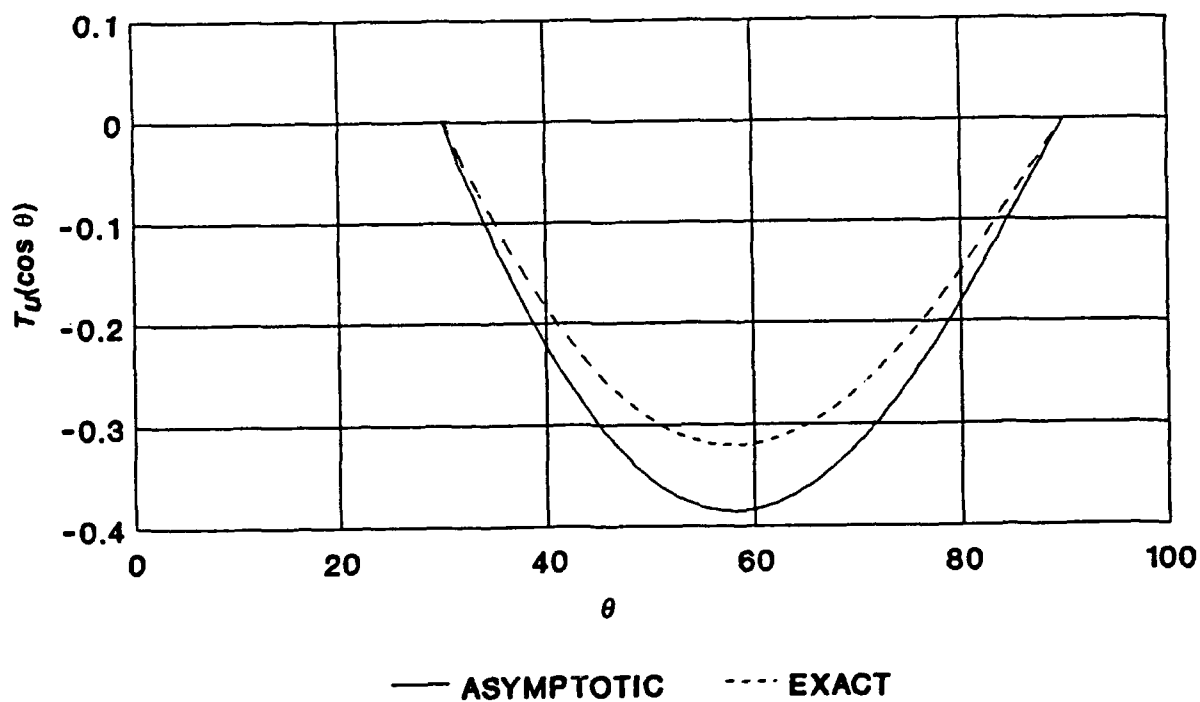
29

Figure A-5. $T_u(\cos\theta)$, $P_u(\cos\theta)$, and $P_u(-\cos\theta)$ as a function of θ for $\theta_0 = 30°$ and $m = 3$.

Figure A-6. $T_u(\cos\theta)$, $P_u(\cos\theta)$, and $P_u(-\cos\theta)$ as a function of θ for $\theta_0 = 30°$ and $m = 4$.

Figure A-7. $T_U(\cos \theta)$, $P_U(\cos \theta)$, and $P_U(-\cos \theta)$ as a function of θ for $\theta_0 = 30°$ and $m = 5$.

Figure A-8. Comparison between asymptotic and exact T_U for $\theta_0 = 30°$ and $m = 1$.
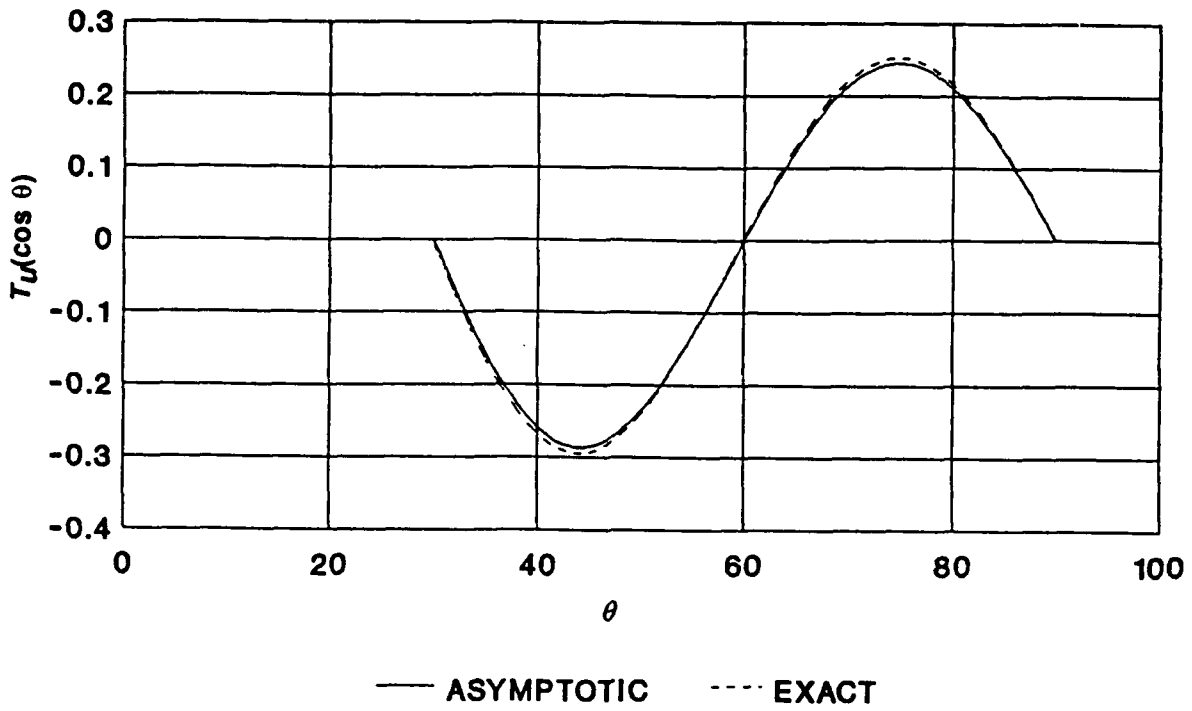
Figure A-9. Comparison between asymptotic and exact T_u for $\theta_0 = 30°$ and $m = 2$.
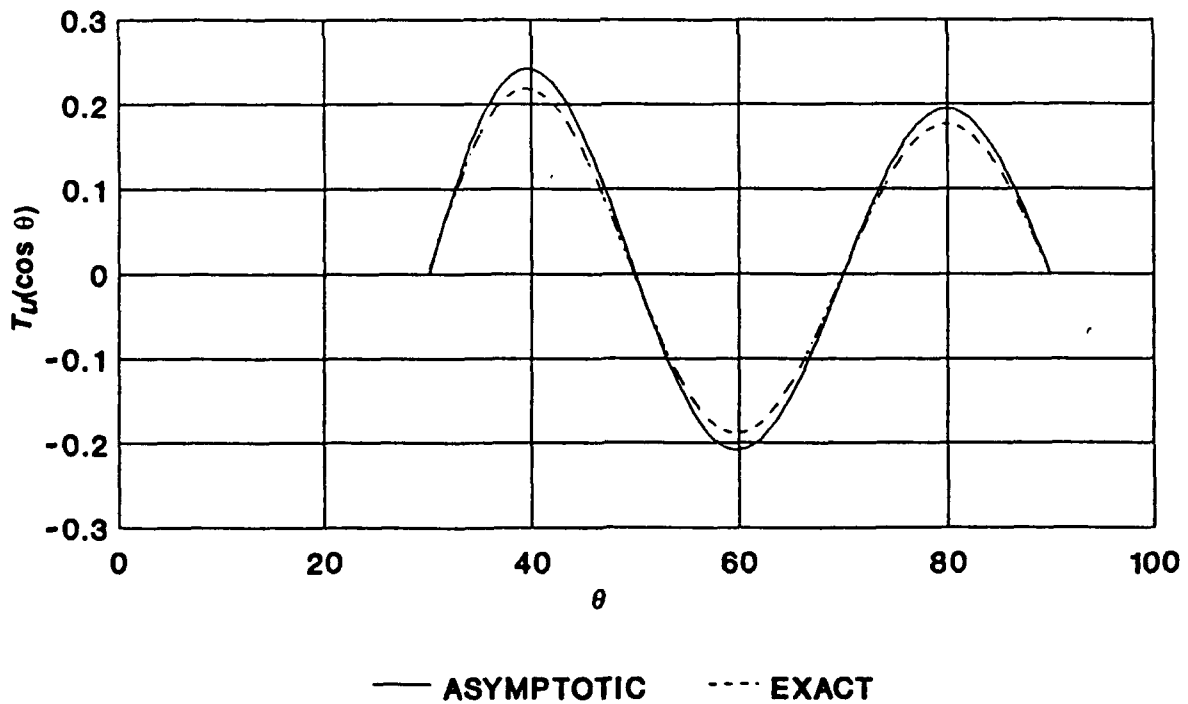

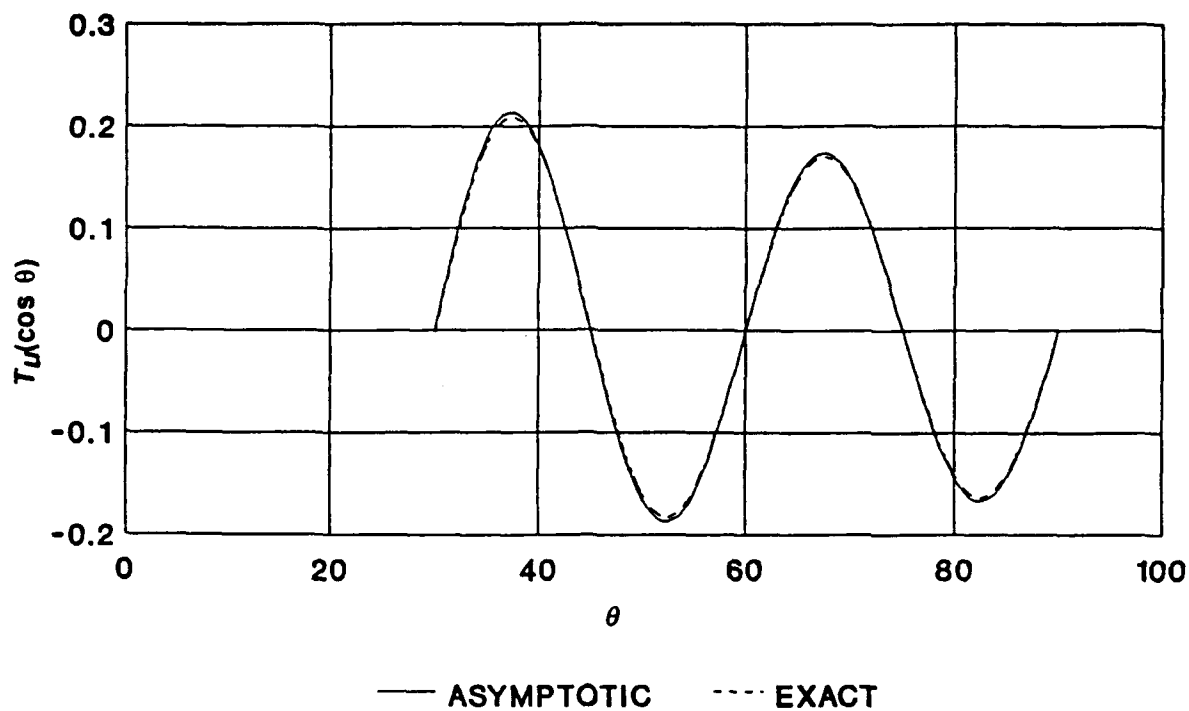**Figure A-10.** Comparison between asymptotic and exact T_u for $\theta_0 = 30°$ and $m = 3$.

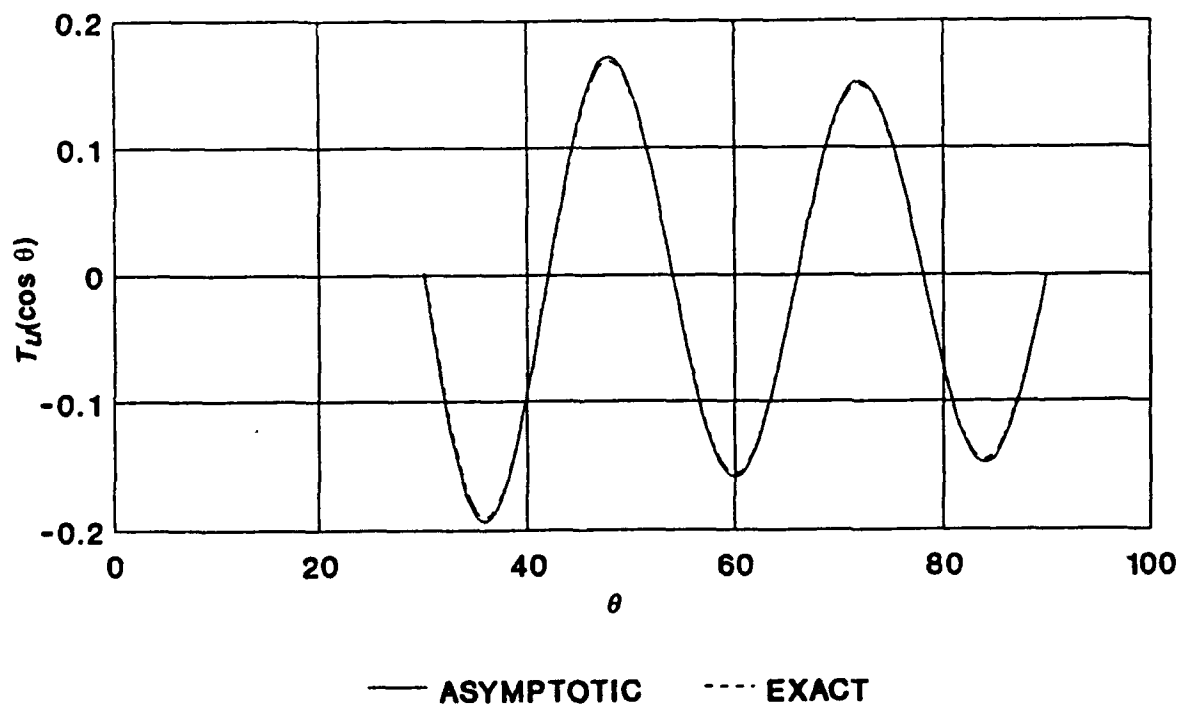Figure A-11. Comparison between asymptotic and exact T_u for $\theta_0 = 30°$ and $m = 4$.

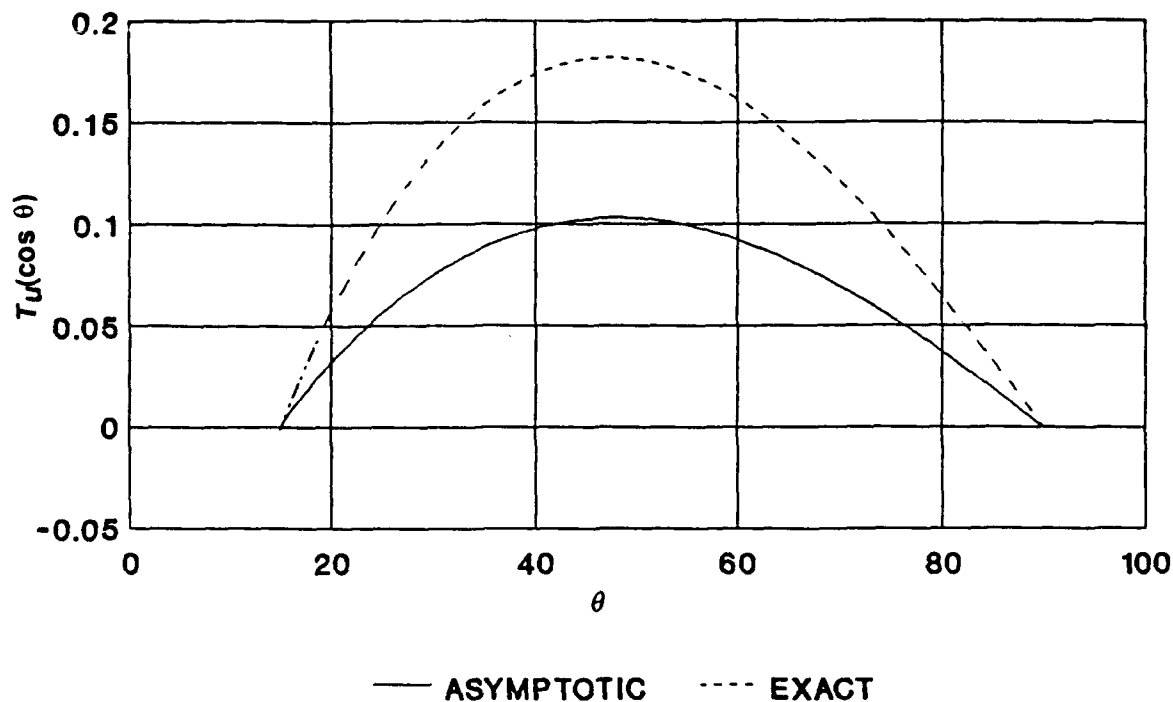Figure A-12. Comparison between asymptotic and exact T_u for $\theta_0 = 30°$ and $m = 5$.

Figure A-13.   Comparison between asymptotic and exact T_u for $\theta_0 = 15°$ and $m = 1$.
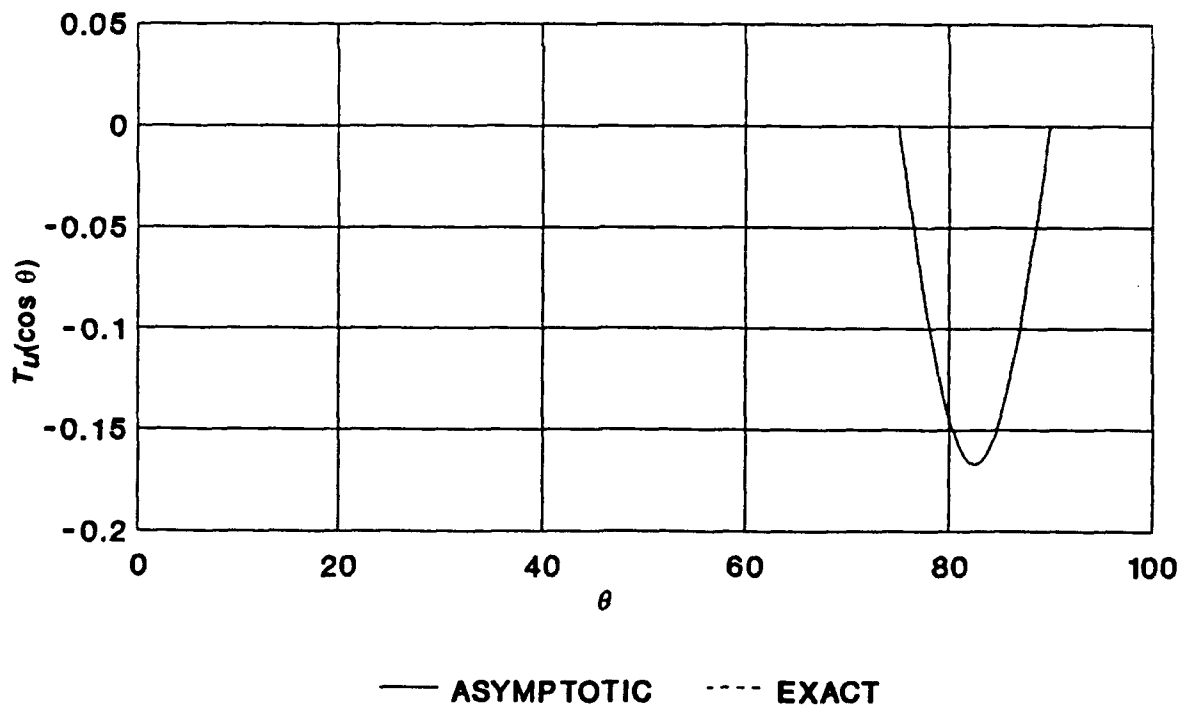

Figure A-14.   Comparison between asymptotic and exact T_u for $\theta_0 = 75°$ and $m = 1$.

REFERENCES

1. M. Abramowitz and I. Stegun, *Handbook of Mathematical Functions*, Appl. Math. Ser. 55, U.S. Government Printing Office, Washington, D.C. (1964).

2. W. Magnus and F. Oberhettinger, *Formulas and Theorems for the Functions of Mathematical Physics*, Chelsea Publishing Company, New York (1949).

3. W. Press, B.P. Flannery, S.A. Teukolsky, and W.T. Vetterling, *Numerical Recipes: The Art of Scientific Computing*, Cambridge University Press (1986).

4. S.A. Schelkunoff, *Advanced Antenna Theory*, John Wiley & Sons, New York (1952).

DISTRIBUTION LIST

ADMINISTRATOR
DEFENSE TECHNICAL INFORMATION CENTER
ATTN: DTIC-DDA   (2 COPIES)
CAMERON STATION, BUILDING 5
ALEXANDRIA, VA 22304-6145

AIR FORCE WEAPONS LABORATORY
ATTN: DR. CARL BAUM
NTAAB
ALBUQUERQUE, NM 87116-008

COMMANDER
US ARMY MATERIEL COMMAND
5001 EISENHOWER AVENUE
ALEXANDRIA, VA 22333-0001

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN: MR. PAUL PRICE
WHITE OAK, MD 20910

ASSISTANT TO THE SECRETARY OF DEFENSE
ATOMIC ENERGY
ATTN: MILITARY APPLICATIONS
ATTN: EXECUTIVE ASSISTANT
WASHINGTON, DC 20301

DIRECTOR
DEFENSE COMMUNICATIONS AGENCY
ATTN: CODE 312
ATTN: CODE C313
ATTN: CODE 430, PARKER
WASHINGTON, DC 20305

DIRECTOR
DEFENSE COMMUNICATIONS ENGINEER
  CENTER
ATTN: CODE R400
ATTN: CODE R123, TECH. LIB.
1860 WIEHLE AVENUE
RESTON, VA 22090

DIRECTOR
DEFENSE NUCLEAR AGENCY
ATTN: TITL   (4 COPIES)
ATTN: RAEV   (2 COPIES)
ATTN: RAEE   (2 COPIES)
ATTN: STNA
WASHINGTON, DC 20305

JOINTS CHIEFS OF STAFF
ATTN: J-3, RM. 2D874
WASHINGTON, DC 20301

NATIONAL COMMUNICATIONS SYSTEM
OFFICE OF THE MANAGER
DEPARTMENT OF DEFENSE
ATTN: NCS-TS
WASHINGTON, DC 20305

DIRECTOR
NATIONAL SECURITY AGENCY
ATTN: TDL
FT GEORGE G. MEADE, MD 20755

DIRECTOR
US ARMY BALLISTIC RESEARCH LABS
ATTN: SLCBR-BLB, W. VAN ANTWERP
ATTN: SLCBR-BLE
ABERDEEN PROVING GROUND, MD 21005

COMMANDER
BMD SYSTEMS COMMAND
DEPARTMENT OF THE ARMY
ATTN: BMDSC-AOLIB
P.O. BOX 1500
HUNTSVILLE, AL 35807

COMMANDER
US ARMY COMMUNICATIONS COMMAND
ATTN: C-LOG-LEO
ATTN: CC-OPS-WS, CONNELL
ATTN: ATSI-CD-MD
FT HUACHUCA, AZ 85613

DIRECTOR
DEFENSE INTELLIGENCE AGENCY
ATTN: DB 4C2, D. SPOHN
ATTN: RTS-2A, TECH. LIB.
WASHINGTON, DC 20301

DIVISION ENGINEER
US ARMY ENGR DIV HUNTSVILLE
ATTN: T. BOLT
P.O. BOX 1600, WEST STATION
HUNTSVILLE, AL 35807

COMMANDER
US ARMY NUCLEAR & CHEMICAL AGENCY
ATTN: MONA-WE
ATTN: R. PFEIFFER
7500 BACKLICK ROAD
BUILDING 2073
SPRINGFIELD, VA 22150

COMMANDER
US ARMY TRAINING & DOCTRINE
   COMMAND
ATTN: ATCD-Z
FT MONROE, VA 23651

COMMANDER
US ARMY DUGWAY PROVING GROUND
DUGWAY, UT 84022

COMMANDER
US ARMY YUMA PROVING GROUND
YUMA, AZ 85364

COMMANDER
WHITE SANDS MISSILE RANGE
DEPT. OF THE ARMY
ATTN: STEWS-TE-N
WHITE SANDS MISSILE RANGE, NM 88002

OKLAHOMA CITY AIR LOGISTICS CENTER
ATTN: CHIEF, TECHNOLOGY SECTION/MMETT
TINKER AFB, OK 73145-5990

BDM CORPORATION
ATTN: CORPORATE LIBRARY
7915 JONES BRANCH ROAD
McLEAN, VA 22101

CHIEF
US ARMY COMMUNICATIONS SYSTEM
AGENCY
DEPARTMENT OF THE ARMY
ATTN: CCM-AD-SV
ATTN: CCM-RD-T
FT MONMOUTH, NJ 07703

BENDIX CORPORATION
COMMUNICATION DIVISION
ATTN: DOCUMENT CONTROL
E. JOPPA ROAD
BALTIMORE, MD 21204

BOOZ·ALLEN & HAMILTON
ATTN: L. ALBRIGHT
ATTN: L. STARLING
4330 EAST WEST HIGHWAY
BETHESDA, MD 20814

DIKEWOOD CORPORATION
ATTN: TECHNICAL LIBRARY
6400 UPTOWN BLVD. N3, SUITE 300E
ALBUQUERQUE, NM 87102

EG&G WASC
ATTN: MR. DAVE ENDSLEY
ATTN: DR. GARY SOWER
2450 ALAMO AVENUE, SE
ALBUQUERQUE, NM 87198

ELECTRO-MAGNETIC APPLICATIONS INC.
ATTN: D. MEREWETHER
P.O. BOX 8482
ALBUQUERQUE, NM 87198

E-SYSTEMS
ATTN: DR. FRED TESCHE
P.O. BOX 1056-CBN-32
GREENVILLE, TX 75401

GENERAL ELECTRIC COMPANY
SPACE DIVISION
VALLEY FORGE SPACE CENTER
ATTN: J. ANDREWS
P.O. BOX 8555
PHILADELPHIA, PA 19101

BDM CORPORATION
SIMULATION TEST FACILITIES DIVISION
ATTN: DR. ROBERT M. PIXTON
P.O. BOX 5412
KIRTLAND AFB, NM 87185

BDM CORPORATION
ATTN: DR. ROBERT HUTCHINS
ATTN: MR. KIM JOHNSON
P.O. BOX 9274
ALBUQUERQUE, NM 87119

IIT RESEARCH INSTITUTE
ELECTROMAG COMPAT ANALYSIS CENTER
ATTN: ACOAT
N. SEVERN
ANNAPOLIS, MD 21402

IIT RESEARCH INSTITUTE
ATTN: I. MINDEL
10 W. 35TH STREET
CHICAGO, IL 60616

MARTIN MARIETTA CORPORATION
ATTN: M. GRIFFITH   (2 COPIES)
ATTN: J. CASELESE
ATTN: B. BROULIK
ORLANDO, FL 32855

McDONNELL DOUGLAS CORPORATION
ATTN: S. SCHNEIDER
ATTN: TECHNICAL LIBRARY SERVICES
5301 BOLSA AVENUE
HUNTINGTON BEACH, CA 92647

MISSION RESEARCH CORPORATION
ATTN: J. RAYMOND
ATTN: J. CHERVENAK
5434 RUFFIN ROAD
SAN DIEGO, CA 92123

MISSION RESEARCH CORPORATION
ATTN: W. CREVIER
ATTN: C. LONGMIRE
ATTN: EMP GROUP
P.O. DRAWER 719
SANTA BARBARA, CA 93102

GTE/GOVERNMENT SYSTEMS
ATTN: J. KILLIAN
1 RESEARCH DRIVE
WESTBORO, MA 01581

HONEYWELL, INC.
AEROSPACE & DEFENSE GROUP
ATTN: S. GRAFF
ATTN: W. STEWART
13350 US HIGHWAY 19 SOUTH
CLEARWATER, FL 33516

RAYTHEON COMPANY
ATTN: G. JOSHI
ATTN: H. FLESCHER
HARTWELL ROAD
BEDFORD, MA 01730

R&D ASSOCIATES
ATTN: DOCUMENT CONTROL
ATTN: W. GRAHAM
ATTN: C. MO
ATTN: M. GROVER
P.O. BOX 9695
MARINA DEL REY, CA 90291

ROCKWELL INTERNATIONAL
ATTN: B-1 DIV TIC (BAOB)
P.O. BOX 92098
LOS ANGELES, CA 90009

SCIENCE APPLICATIONS INTERNAT CORP
ATTN: R. SUTTON
1710 GOODRICH DRIVE
McLEAN, VA 22102

SCIENCE APPLICATIONS INTERNAT CORP
ATTN: PATRICK J. DOWLING
2860 SOUTH CIRCLE DRIVE
COLORADO SPRINGS, CO 80906

S-CUBED
ATTN: J. KNIGHTON
3398 CARMEL MOUNTAIN ROAD
SAN DIEGO, CA 92138

MISSION RESEARCH CORPORATION
ATTN: W. WARE
4953 N. 30TH STREET
COLORADO SPRINGS, CO 80919

NORTHROP CORPORATION
ELECTRONIC DIVISION
ATTN: B. AHLPORT
2301 W. 120TH STREET
HAWTHORNE, CA 90250

PHYSICS INTERNATIONAL COMPANY
ATTN: DR. C. STALLINGS
ATTN: DR. SIK-LAM WONG
ATTN: J.T. NAFF
2700 MERCED STREET
P.O. BOX 1538
SAN LEANDRO, CA 94577

TELEDYNE BROWN ENGINEERING
ATTN: D. GUICE
CUMMINGS RESEARCH PARK
HUNTSVILLE, AL 35807

US ARMY LABORATORY COMMAND
ATTN: DIR, CORP LABS, AMSLC-DL

INSTALLATION SUPPORT ACTIVITY
ATTN: LEGAL OFFICE, SLCIS-CC

USAISC
ATTN: RECORD COPY, AMSLC-IM-VA
ATTN: TECHNICAL PUBLISHING BRANCH,
        AMSLC-IM-VP

HARRY DIAMOND LABORATORIES
ATTN: D/DIVISION DIRECTORS
ATTN: CHIEF SCIENTIST, SLCHD-CS
ATTN: LIBRARY SLCHD-TL   (3 COPIES)
ATTN: LIBRARY SLCHD-TL   (WOODBRIDGE)
ATTN: CHIEF, SLCHD-IT-EA
ATTN: B. ZABLUDOWSKI, SLCHD-TA-ET
ATTN: J.M. DEHART, SLCHD-TA-SE
ATTN: DIRECTOR, SLCHD-NW
ATTN: DEPUTY DIRECTOR, SLCHD-NW-E
ATTN: E. PATRICK, SLCHD-NW-E

SEA
MARINER SQUARE
ATTN: W. HUTCHINSON
P.O. BOX 31819
SUITE 127
1900 N. NORTHLAKE WAY
SEATTLE, WA 98103

SOL TELECOMMUNICATION SERVICES INC
ATTN: MR. SAMUEL CLARK
2000 CORPORATE RIDGE, SUITE 810
McLEAN, VA 22102

SRI INTERNATIONAL
ATTN: E. VANCE
333 RAVENSWOOD AVENUE
MENLO PARK, CA 94025

TRW ELECTRONICS & DEFENSE SYSTEMS
  GROUP
ATTN: W. GARGARO
ATTN: R. PLEBUCH
ATTN: C. ADAMS
ATTN: H. HOLLOWAY
ATTN: J. PENAR
ONE SPACE PARK
REDONDO BEACH, CA 90278

HARRY DIAMOND LABORATORIES
ATTN: CHIEF, SLCHD-NW-EP
ATTN: CHIEF, SLCHD-NW-EH
ATTN: CHIEF, SLCHD-NW-ES
ATTN: CHIEF, SLCHD-NW-CS
ATTN: CHIEF, SLCHD-NW-P
ATTN: CHIEF, SLCHD-NW-R
ATTN: CHIEF, SLCHD-NW-RP
ATTN: CHIEF, SLCHD-NW-RS
ATTN: CHIEF, SLCHD-NW-TN
ATTN: CHIEF, SLCHD-NW-TS
ATTN: CHIEF, SLCHD-HPM
ATTN: T. WALTEMYER, SLCHD-NW-ES
                    (10 COPIES)